

Atlas Parameters					
Model	Model	Atlas 1.6	Atlas 1.9	Atlas 2.6	Atlas 4
	Pixel Pitch (mm)	1.6	1.9	2.6	4
	Physical Density (dot/m ²)	390625	262144	140625	62500
	LED Type	SMD1010	Mini LED/SMD1515	SMD2121	SMD2121
	Module Size (mm*mm)	256*288	256*288	256*288	256*288
	Module Resolution(px*px)	160*180	130*146	96*108	64*72
	Viewing Angle (Deg)	140°(H)/150°(V)	140°(H)/150°(V)	140°(H)/150°(V)	140°(H)/150°(V)
	Brightness (nits)	800	850	1000	800
	Gray Scale (bit)	16	16	16	16
	Refresh Rate (Hz)	3840	3840	3840	3840
Main Technical Parameters	Max. Power Consumption(W/m ²)	640	640	640	640
	Average Power Consumption(W/m ²)	256	256	256	256
	Cabinet Size(mm*mm*mm)	1024*288*40 / 768*288*40 / 512*288*40			
	Cabinet Weight (±0.25kg)	7 / 6 / 5			
	Input Voltage (AC)	100-240V	100-240V	100-240V	100-240V
	Ingress Protection	IP20	IP20	IP20	IP20
	Working Environment	Indoor	Indoor	Indoor	Indoor
	Certificates	ETL / FCC / CE / EMC	ETL / FCC / CE / EMC	ETL / FCC / CE / EMC	ETL / FCC / CE / EMC


Application Reference



Shopping Mall



Ceiling

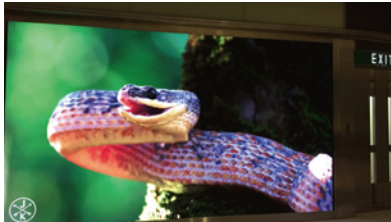


Window Advertising




— Atlas —

Indoor Fixed • Ultra Light & Thin


◆ Features of Atlas

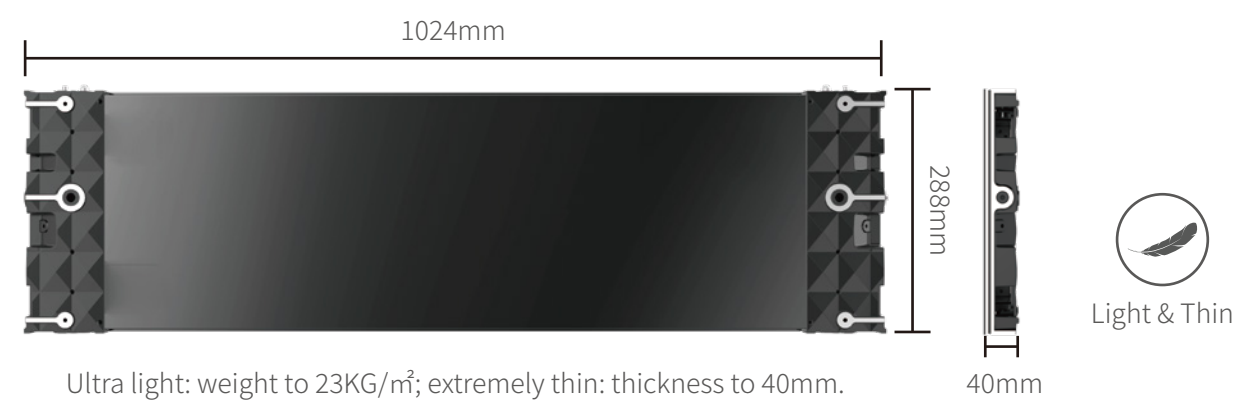


◆ 16:9 Ratio, Easily Splicing 2K/4K/8K Screen

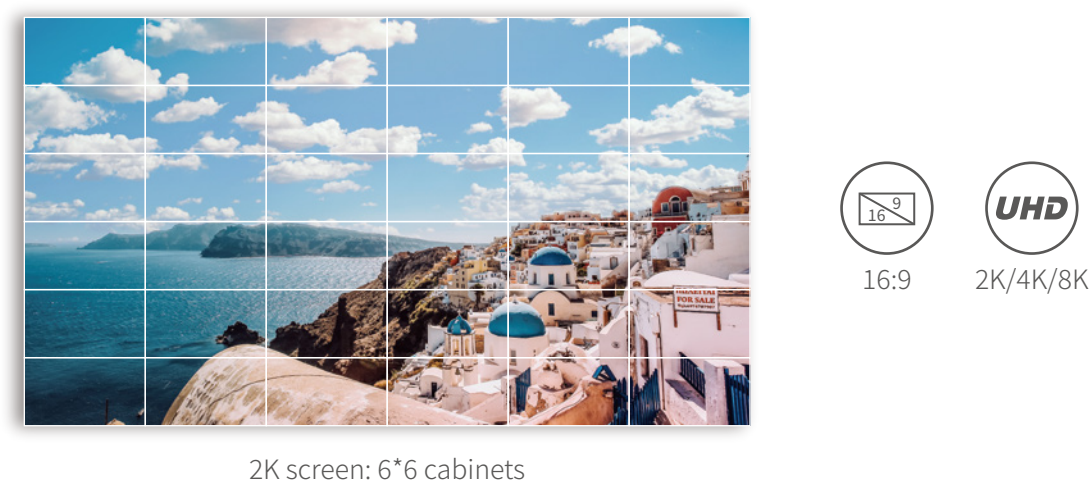


◆ Wireless Connection Design: Simple Structure, Easy Maintenance

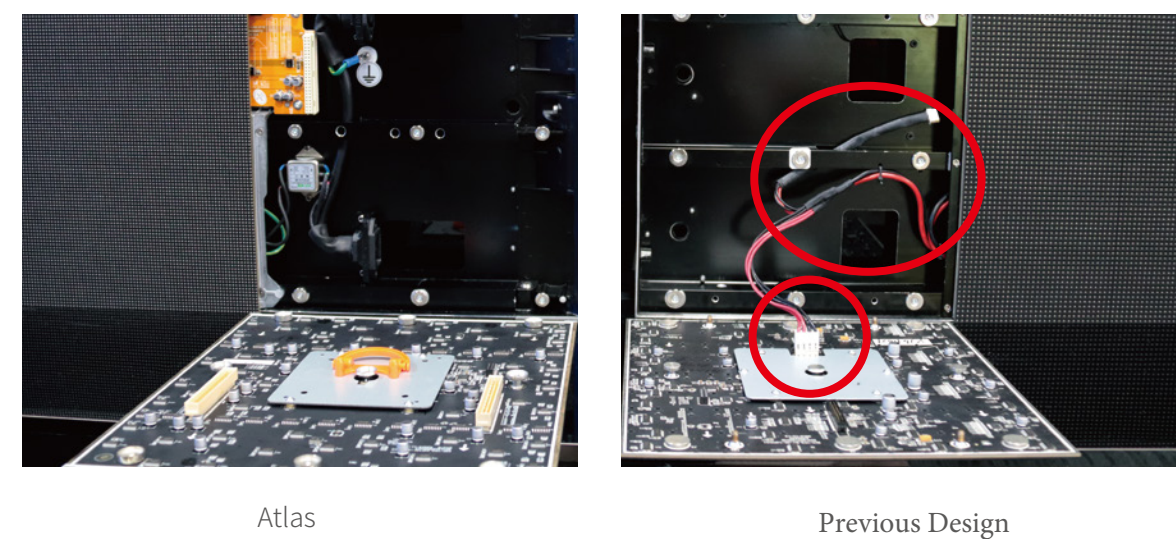

◆ backup Power Supply and Receiving Card

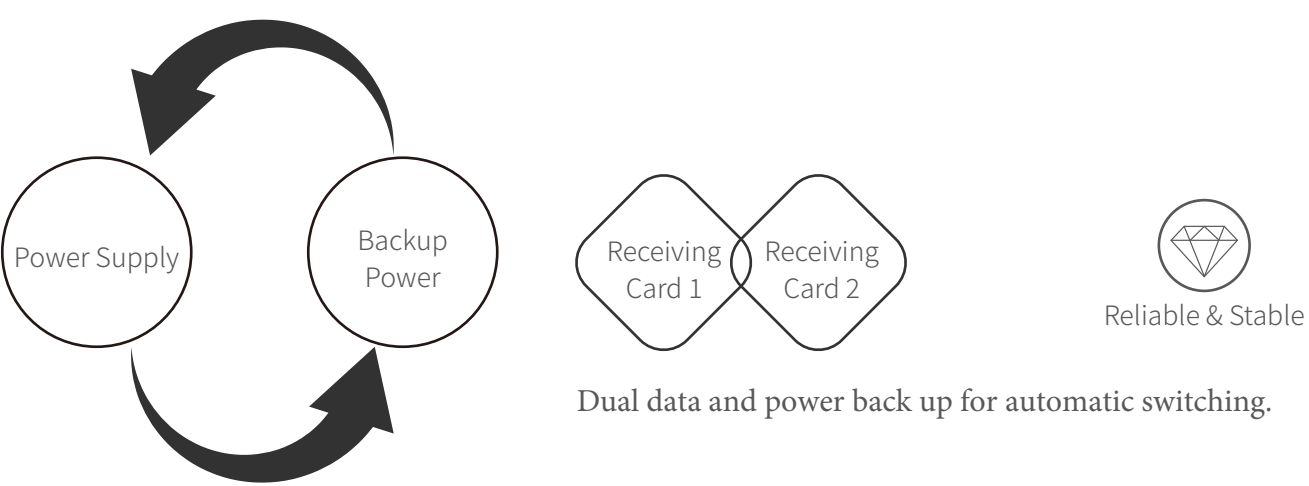

◆ Front Maintenance, Various Installation Methods

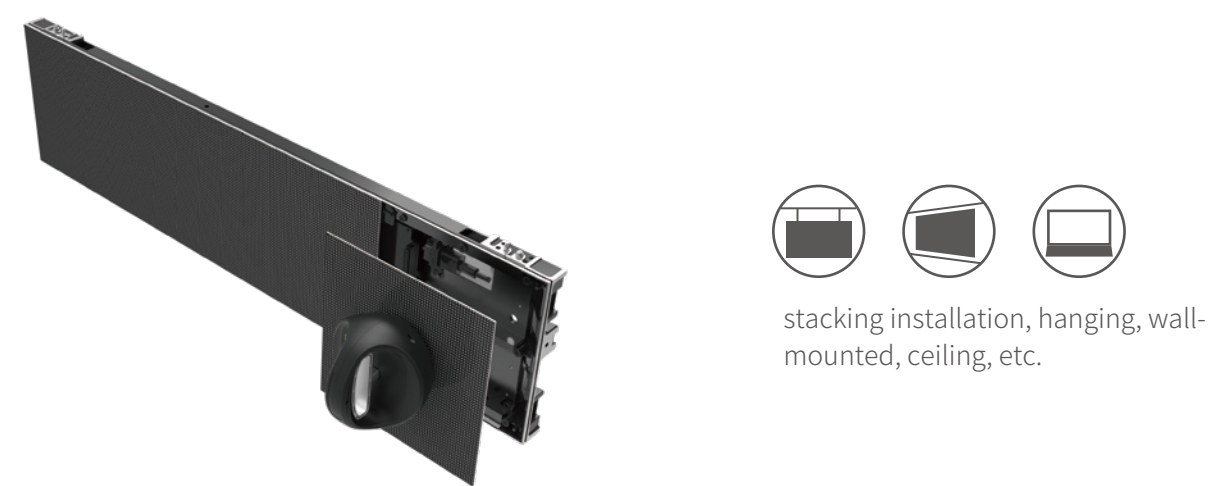

◆ Various Sizes and Customized Cabinet Angle (0-45°) for Flexible Splicing

